

ENERGY SAVING
TECHNOLOGY

IS-374



CM/L-8530170316

CROSSA[®]






3 BLADE

MODEL : ABS NEW

TECHNICAL SPECIFICATION	
Rated Power	25 W
Max. Power	40 W - 50 Hz
BLDC Fan	1200mm
RPM	315 - 400 RPM
Standby power	≤ 0.5 W
Input voltage range	100-350 Vac
Operating temperature range	20~55 C
PF	> 0.99 (@32W)
THD	<5% (@32W)

MODEL : 71

TECHNICAL SPECIFICATION	
Rated Power	25 W
Max. Power	40 W - 50 Hz
BLDC Fan	1200mm
RPM	315 - 400 RPM
Standby power	≤ 0.5 W
Input voltage range	100-350 Vac
Operating temperature range	20~55 C
PF	> 0.99 (@32W)
THD	<5% (@32W)

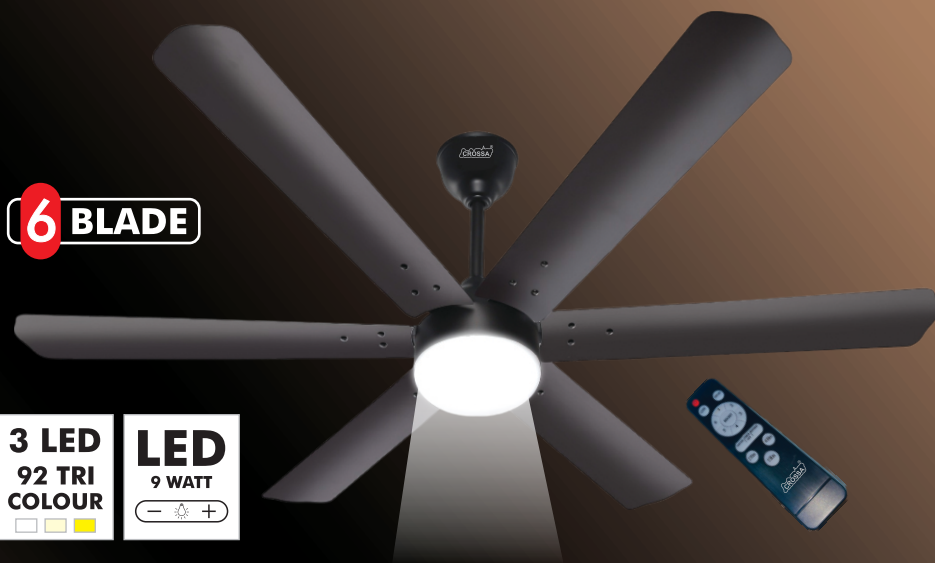

6 BLADE



3 BLADE

MODEL : 72

TECHNICAL SPECIFICATION	
Rated Power	25 W
Max. Power	40 W - 50 Hz
BLDC Fan	1200mm
RPM	315 - 400 RPM
Standby power	≤ 0.5 W
Input voltage range	100-350 Vac
Operating temperature range	20~55 C
PF	> 0.99 (@32W)
THD	<5% (@32W)

MODEL : ABS HIGH

TECHNICAL SPECIFICATION	
Rated Power	25 W
Max. Power	40 W - 50 Hz
BLDC Fan	1200mm
RPM	315 - 400 RPM
Standby power	≤ 0.5 W
Input voltage range	100-350 Vac
Operating temperature range	20~55 C
PF	> 0.99 (@32W)
THD	<5% (@32W)



3 BLADE

MODEL : 72

TECHNICAL SPECIFICATION	
Rated Power	25 W
Max. Power	32 W - 50 Hz
BLDC Fan	1200mm
RPM	315 - 400 RPM
Standby power	≤ 0.5 W
Input voltage range	100-350 Vac
Operating temperature range	20~55 C
PF	> 0.99 (@32W)
THD	<5% (@32W)

3 BLADE



3 BLADE

MODEL : 81

TECHNICAL SPECIFICATION	
Rated Power	25 W
Max. Power	32 W - 50 Hz
BLDC Fan	1200mm
RPM	315 - 400 RPM
Standby power	≤ 0.5 W
Input voltage range	100-350 Vac
Operating temperature range	20~55 C
PF	> 0.99 (@32W)
THD	<5% (@32W)

MODEL : 84

TECHNICAL SPECIFICATION	
Rated Power	25 W
Max. Power	32 W - 50 Hz
BLDC Fan	1200mm
RPM	315 - 400 RPM
Standby power	≤ 0.5 W
Input voltage range	100-350 Vac
Operating temperature range	20~55 C
PF	> 0.99 (@32W)
THD	<5% (@32W)


3 BLADE



MODEL : 73

TECHNICAL SPECIFICATION	
Rated Power	25 W
Max. Power	32 W - 50 Hz
BLDC Fan	1200mm
RPM	315 - 400 RPM
Standby power	≤ 0.5 W
Input voltage range	100-350 Vac
Operating temperature range	20~55 C
PF	> 0.99 (@32W)
THD	<5% (@32W)

3 BLADE

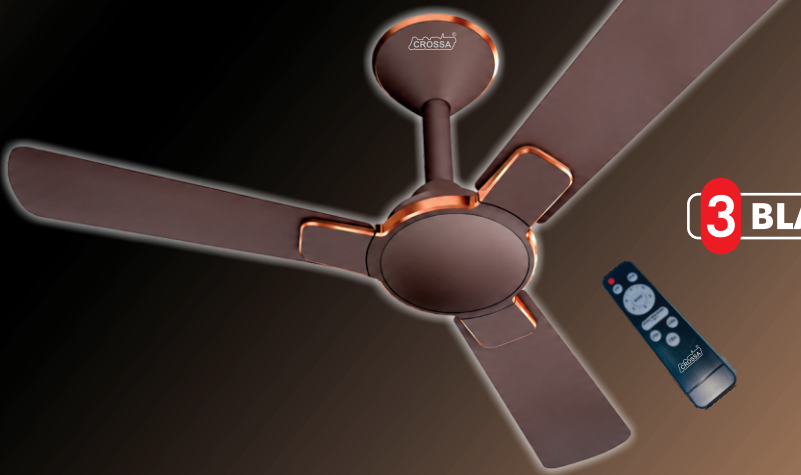



3 BLADE

MODEL : 79

TECHNICAL SPECIFICATION	
Rated Power	25 W
Max. Power	32 W - 50 Hz
BLDC Fan	1200mm
RPM	315 - 400 RPM
Standby power	≤ 0.5 W
Input voltage range	100-350 Vac
Operating temperature range	20~55 C
PF	> 0.99 (@32W)
THD	<5% (@32W)

MODEL : 72

TECHNICAL SPECIFICATION	
Rated Power	25 W
Max. Power	32 W - 50 Hz
BLDC Fan	1200mm
RPM	315 - 400 RPM
Standby power	≤ 0.5 W
Input voltage range	100-350 Vac
Operating temperature range	20~55 C
PF	> 0.99 (@32W)
THD	<5% (@32W)



3 BLADE



**INVISIBLE
BLADE**



CONTACT US

KOHINOOR ELECTRICAL GOODS



Sector-1, M-254, Bawana
Industrial Area, Delhi-110039



+91-9625350897, +91-9560819430
+91-9716152745, +91-9899362319
+91-9899991715



www.crossa.co.in



crossamachine@gmail.com